

# OUTLET BOX FRAME EXTENSION

» 696 SERIES

OxBox™

|                  |                 |
|------------------|-----------------|
| ITEM # SUBMITTED | <u>696-EX</u>   |
| JOB NAME         | _____           |
| LOCATION         | _____           |
| ENGINEER         | _____           |
| CONTRACTOR       | _____           |
| PO#              | _____ TAG _____ |

## SPECIFICATION

Sioux Chief 696 series OxBox frame extension shall be used where necessary in accessible plumbing applications. The extension shall extend the outlet box face 1/2" and accommodate additional layers of drywall. The extension shall be affixed to a current 696 drain or supply box. Multiple extensions can be used in combination to achieve most depths needed when providing access within the 696 series.

## MATERIALS

Frame extension: fire-rated ABS

## SAFE WORKING TEMPERATURE

Melting point: 200°F

Working temperature: 150°F

## CERTIFICATIONS

Certified for use with Sioux Chief's fire-rated series of OxBox to ASTM E-814, ASTM E-119, and UL 1479


See fire-rated OxBox specification sheets

## DIMENSIONS

|           |      |
|-----------|------|
| A: height | 5.5" |
| B: width  | 4.0" |
| C: depth  | 1.0" |



696-EX

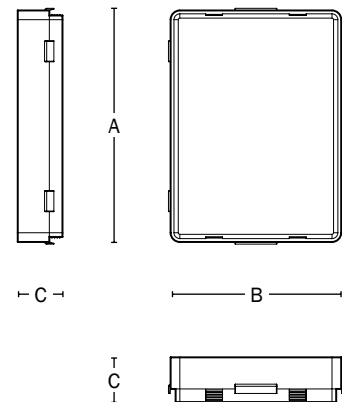

Item Number

**696-EX**