


| Qty. | Description |
|------|-------------|
|------|-------------|




| | |
|---|--|
| 1 | <p>MI 301</p>  <p>Note! Product picture may differ from actual product</p> <p>Product No.: 98046408</p> <p>The Grundfos GO Remote is used to establish wireless connection to a Grundfos product, using a standard Android or iOS platform, with the Grundfos GO Remote App installed. The App is available from Apple App Store and Google Play free of charge.</p> <p>The MI 301 is a module with built-in infrared and radio communication. It must be used in conjunction with an Android or iOS-based Smartphone with Bluetooth Low Energy connection. The MI 301 module has rechargeable Li-ion battery and must be charged separately.</p> <p>The pump/system can be monitored and controlled from the Grundfos GO, and it will be possible to create pdf reports. The specific functions available depend on each individual product.</p> <p>Supplied with the product</p> <ul style="list-style-type: none"> Grundfos MI 301 Battery charger Quickguide |
|---|--|



| Description | Value |
|-------------------------------|---------------------------------------|
| General information: | |
| Product name: | MI 301 |
| Product No: | 98046408 |
| EAN number: | 5710628055591 |
| Installation: | |
| Range of ambient temperature: | -20 .. 70 °C |
| Relative humidity: | 95 % |
| Operating temp.: | -10 °C |
| Operating temp.: | 50 °C |
| Electrical data: | |
| Voltage supply: | Li-ion battery 3.7 V, 560 mAh, 2.1 Wh |
| Maximum current consumption: | 0.03 A |
| Enclosure class (IEC 34-5): | IP40 |
| Others: | |
| Danish VVS No.: | 380679301 |
| Swedish RSK No.: | 5731821 |
| Finnish LVI No.: | 4615956 |
| Norwegian NRF no.: | 9040866 |

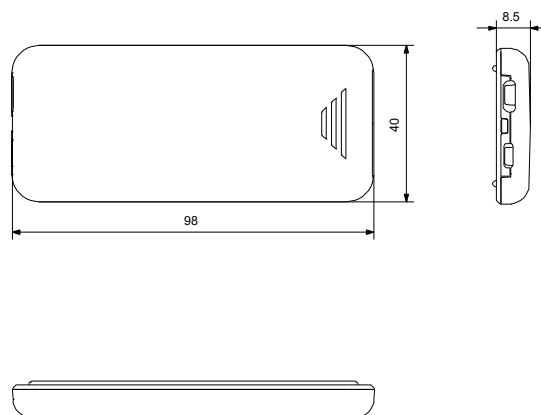

98046408 MI 301

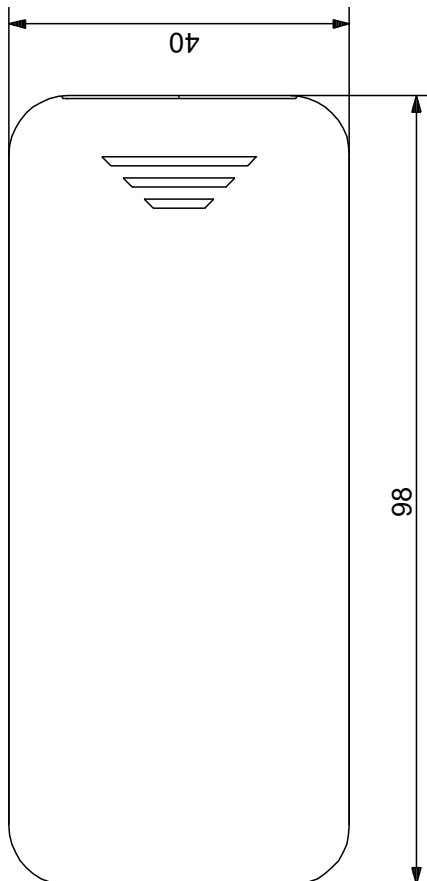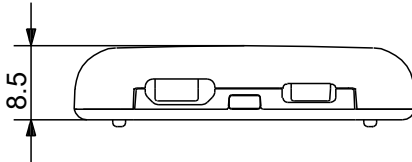

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.