

Submittal Data

PROJECT:	UNIT TAG:	QUANTITY:
REPRESENTATIVE: _____	TYPE OF SERVICE:	DATE: _____
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:
	ORDER NO.:	DATE:




15 SQE05-70

Submersible pumps with variable speed motor

Note! Product picture may differ from actual product

Conditions of Service	Pump Data	Motor Data
Liquid: Water Temperature: 68 °F Specific Gravity: 1.000	Liquid temperature range: 32 .. 95 °F Product number: On request	Rated voltage: 100-120 V Mains frequency: 60 Hz Enclosure class: IP68 Insulation class: F Motor protection: Y Thermal protection: INT Motor type: MSE3

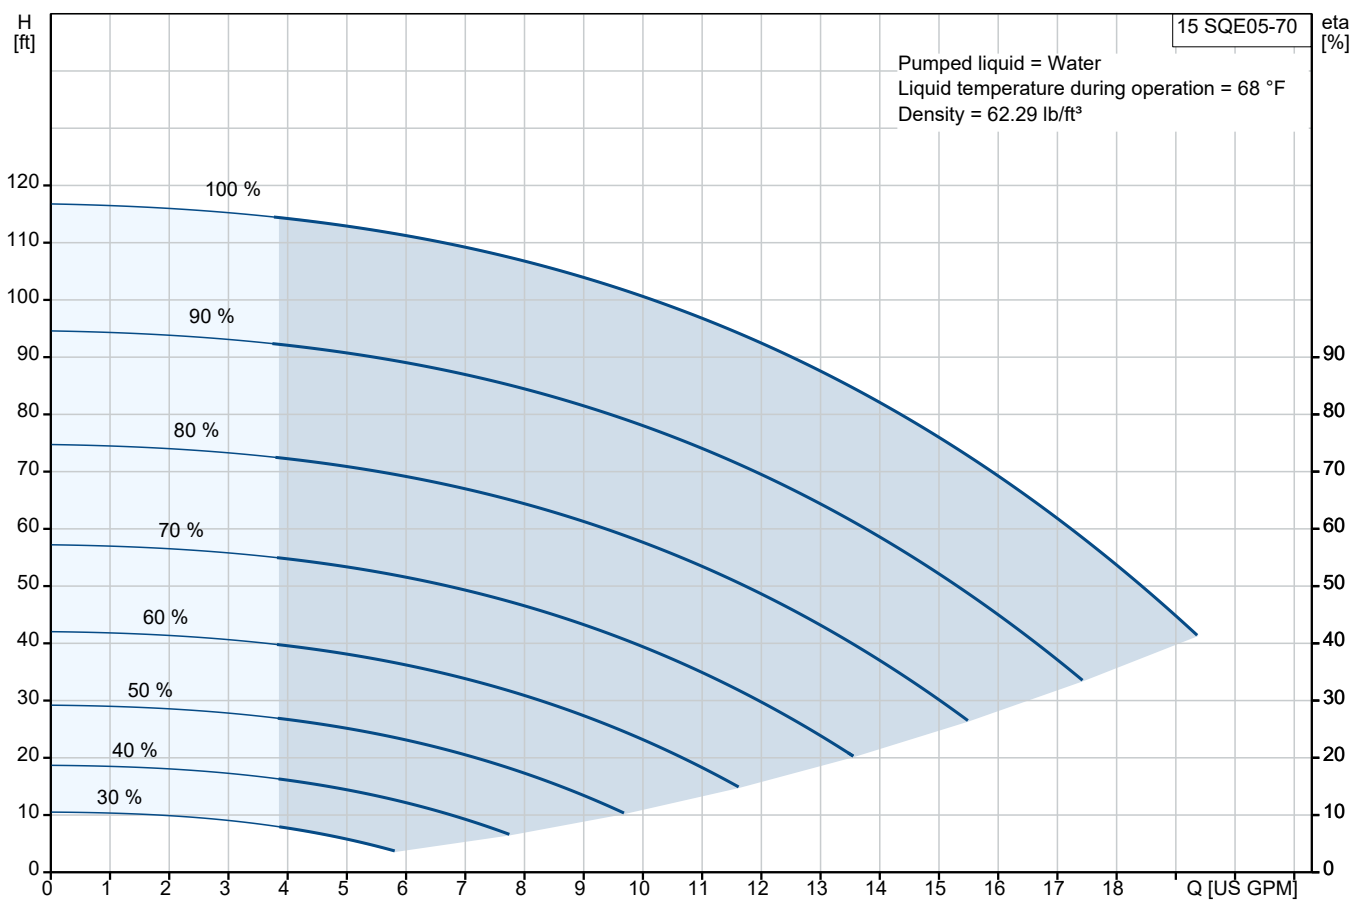

Submittal Data


Materials:

Impeller: Composite

Motor: Stainless steel

Motor: DIN W.-Nr. 1.4301

Motor: AISI 304

Qty.	Description
1	<p>15 SQE05-70</p>  <p>Note! Product picture may differ from actual product</p> <p>Product No.: On request</p> <p>3" multi-stage, submersible pump designed for domestic water supply, liquid transfer in tanks, irrigation and environmental applications. The pump has "floating" impellers, each with its own tungsten carbide/ceramic bearing.</p> <p>The pump features soft starting and protection against dry-running, upthrust, overvoltage, undervoltage, overload and overtemperature.</p> <p>The motor is a single-phase motor of the permanent magnet rotor type ensuring optimum efficiency within a wide load range.</p> <p>The motor is fitted with a replaceable end cover with socket.</p> <p>Liquid:</p> <p>Pumped liquid: Water</p> <p>Liquid temperature range: 32 .. 95 °F</p> <p>Selected liquid temperature: 68 °F</p> <p>Density: 62.29 lb/ft³</p> <p>Technical:</p> <p>Pump speed on which pump data are based: 10700 rpm</p> <p>Rated flow: 13.2 US GPM</p> <p>Rated head: 85.31 ft</p> <p>Approvals: cULus</p> <p>Curve tolerance: ISO9906:2012 3B</p> <p>Materials:</p> <p>Pump: Stainless steel EN 1.4301 AISI 304</p> <p>Impeller: Composite ZYTEL 70G30 HSLR PA6.6-GF30</p> <p>Motor: Stainless steel DIN W.-Nr. 1.4301 AISI 304</p> <p>Installation:</p> <p>Maximum operating pressure: 217.56 psi</p> <p>Pump outlet: 1 1/4"NPT</p> <p>Minimum borehole diameter: 2.99 in</p> <p>Electrical data:</p> <p>Motor type: MSE3</p> <p>Power input - P1: 1.05 kW</p> <p>Rated power - P2: 0.939 HP</p> <p>Power (P2) required by pump: 0.939 HP</p> <p>Mains frequency: 60 Hz</p>



Company name:

Created by:


Phone:

Date:



19/08/2024

Qty.	Description
1	<div><div><div>Rated voltage:</div><div>Service factor:</div><div>Rated current:</div><div>Power factor:</div><div>Rated speed:</div><div>Start. method:</div><div>Enclosure class (IEC 34-5):</div><div>Insulation class (IEC 85):</div><div>Length of cable:</div><div>Motor No:</div></div><div><div>1 x 100-120 V</div><div>1.85</div><div>12 A</div><div>1.00</div><div>10700 rpm</div><div>DOL</div><div>IP68</div><div>F</div><div>4.92 ft</div><div>96160552</div></div></div> <div><div>Others:</div><div>Net weight:</div><div>Gross weight:</div><div>Country of origin:</div><div>Custom tariff no.:</div></div> <div><div></div><div>10.6 lb</div><div>11.9 lb</div><div>MX</div><div>8413.70.2004</div></div>

On request 15 SQE05-70 60 Hz

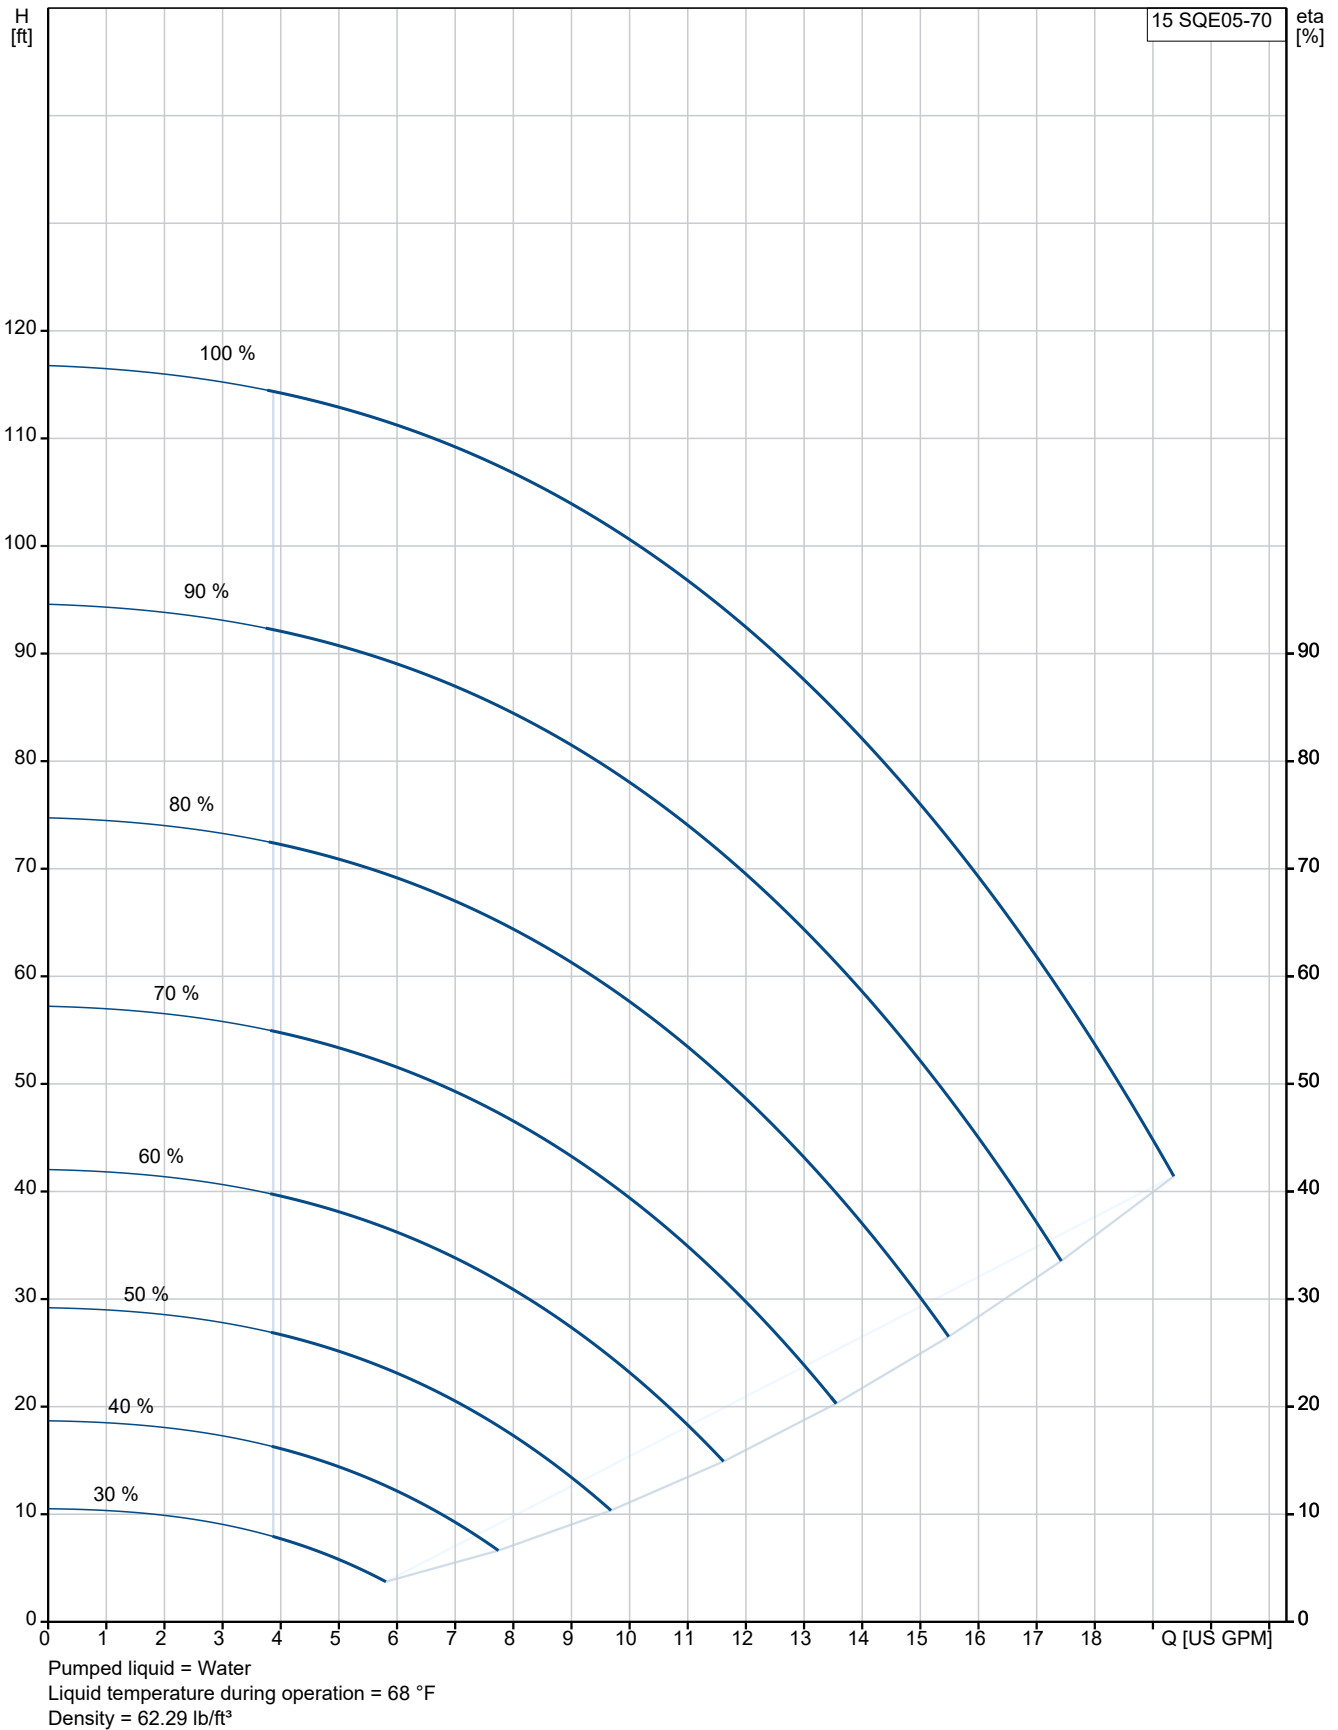

Description	Value
General information:	
Product name:	15 SQE05-70
Product No:	On request
EAN number:	On request
Technical:	
Pump speed on which pump data are based:	10700 rpm
Rated flow:	13.2 US GPM
Rated head:	85.31 ft
Stages:	2
Approvals:	cULus
Curve tolerance:	ISO9906:2012 3B
Pump No:	96397437
Model:	B
Valve:	Y
Materials:	
Pump:	Stainless steel
Pump:	EN 1.4301
Pump:	AISI 304
Impeller:	Composite
Impeller:	ZYTEL 70G30 HSLR PA6.6-GF30
Motor:	Stainless steel
Motor:	DIN W.-Nr. 1.4301
Motor:	AISI 304
Installation:	
Maximum operating pressure:	217.56 psi
Pump outlet:	1 1/4"NPT
Minimum borehole diameter:	2.99 in
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	32 .. 95 °F
Selected liquid temperature:	68 °F
Density:	62.29 lb/ft³
Electrical data:	
Motor type:	MSE3
Power input - P1:	1.05 kW
Rated power - P2:	0.939 HP
Power (P2) required by pump:	0.939 HP
Mains frequency:	60 Hz
Rated voltage:	1 x 100-120 V
Service factor:	1.85
Rated current:	12 A
Power factor:	1.00
Rated speed:	10700 rpm
Start. method:	DOL
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Built-in motor protection:	Y
Thermal protec:	INT
Length of cable:	4.92 ft
Motor No:	96160552
Controls:	
CU 300/CU 301:	Y
Others:	
Net weight:	10.6 lb
Gross weight:	11.9 lb
Sales region:	Namreg

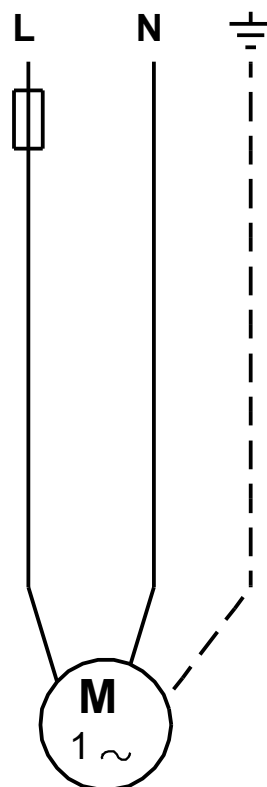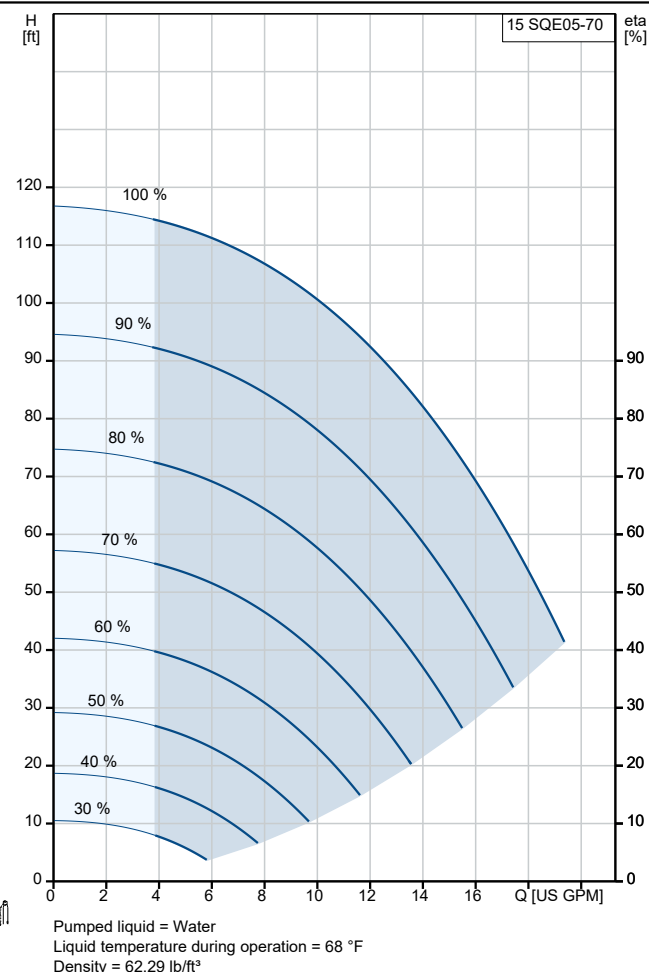



Company name:

Created by:


Phone:

Date:

19/08/2024

Description	Value
Country of origin:	MX
Custom tariff no.:	8413.70.2004

On request 15 SQE05-70 60 Hz

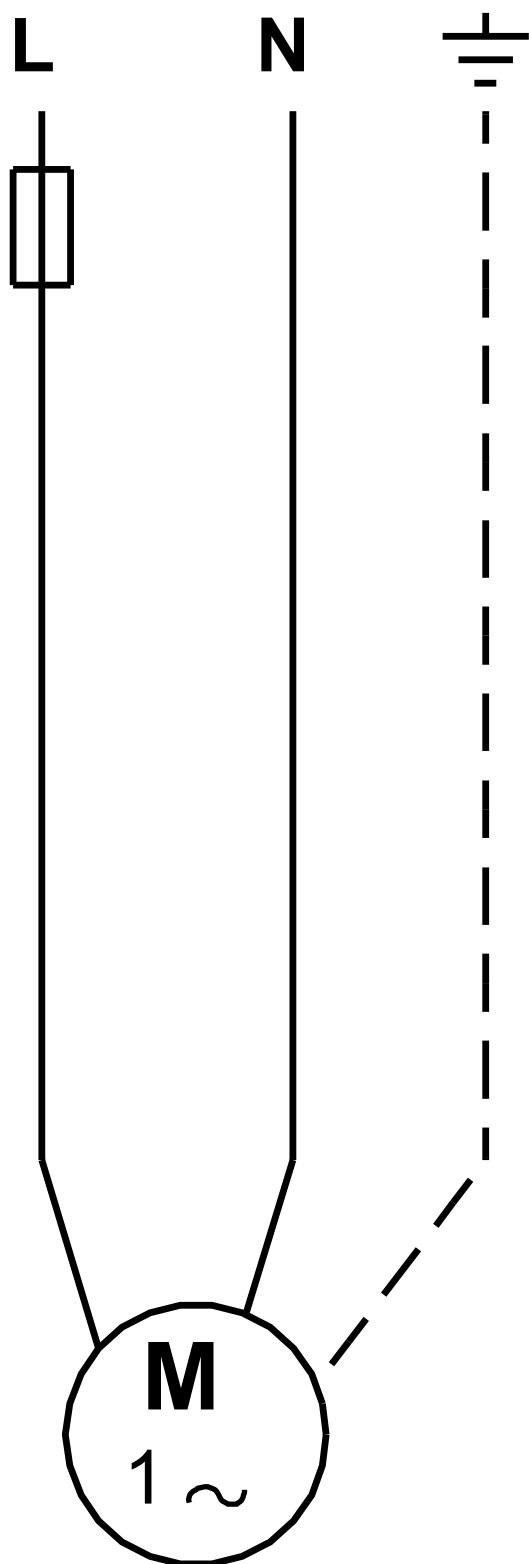

Note! All units are in [in] unless others are stated.

